

Panel Mount LCD

17"

Specifications




| | |
|--------------------------------|---|
| Model Name | S17L500-PMM1 |
| Viewable Size Image | 17" |
| Active Display Area(mm) | 337.92(H)x270.34(V) |
| Pixel Pitch(mm) | 0.264(H)x0.264(V) |
| Number of Pixels | 1280 x 1024 |
| Contrast Ratio | 1000:1(typ.) |
| Display Color | 16.7M |
| Brightness(cd/m ²) | 350(typ.) |
| Viewing Angle(CR>=10) | -85~85(H);-80~80(V) |
| Synchronization Range | |
| Horizontal/Vertical | 31.5~80.0KHz/60~75Hz |
| Recommended Resolution | 1280 x 1024@60Hz, 75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 36W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive,Capacitive,SAW |

Remarks:S17L500 series= VGA input only


S17L540 series= VGA+Video Input

*It supports NTSC/PAL video sources through a composite Video or S-Video connector

Mechanical Drawing

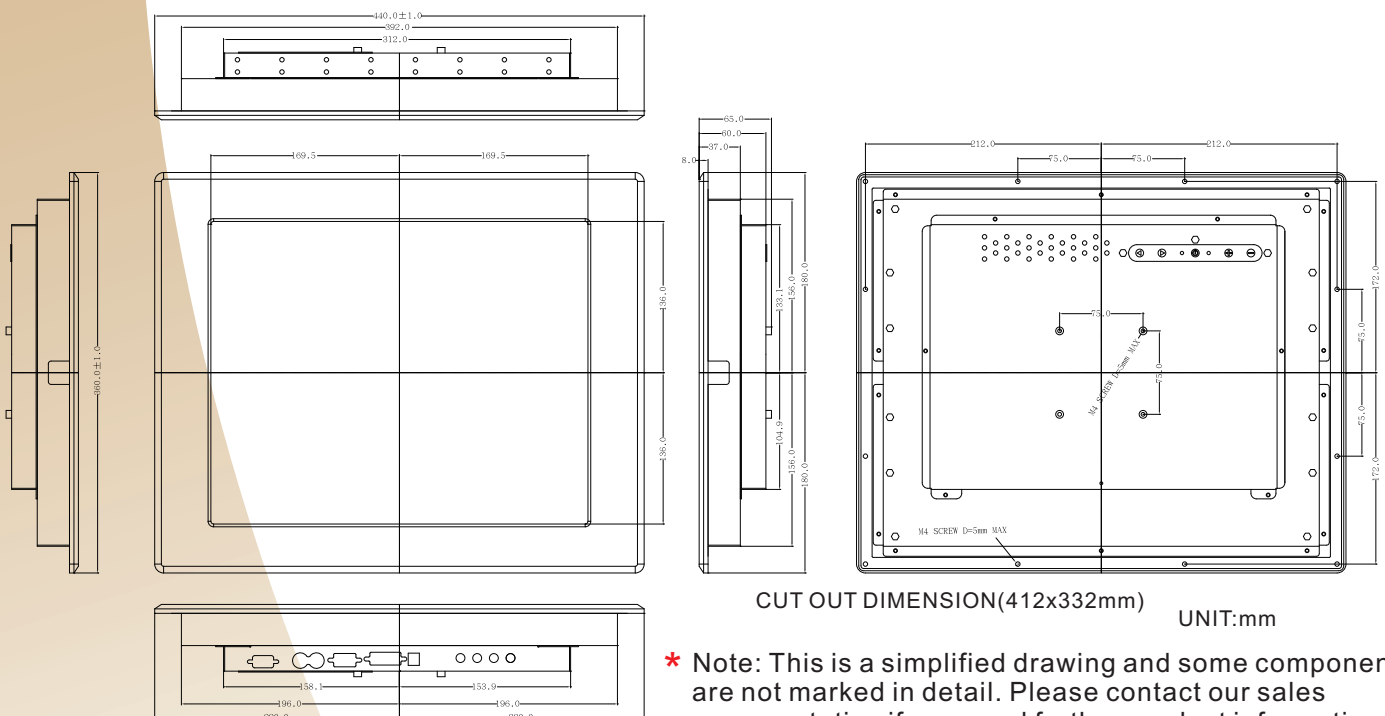

* Note: This is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

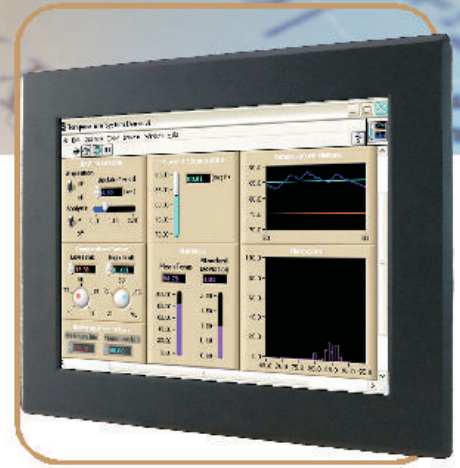

| Rev. | Reasons | Revised Date |
|------|-------------|--------------|
| 1.1 | Spec Change | Apr-24-13 |
| 1.2 | Spec Change | Jun-11-13 |
| 1.3 | Spec Change | Nov-26-13 |