


12.1" P-Cap Chassis Display - R12L100-PCM2(HB)

Features

- 12.1" 1024 x 768 Resolution
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design

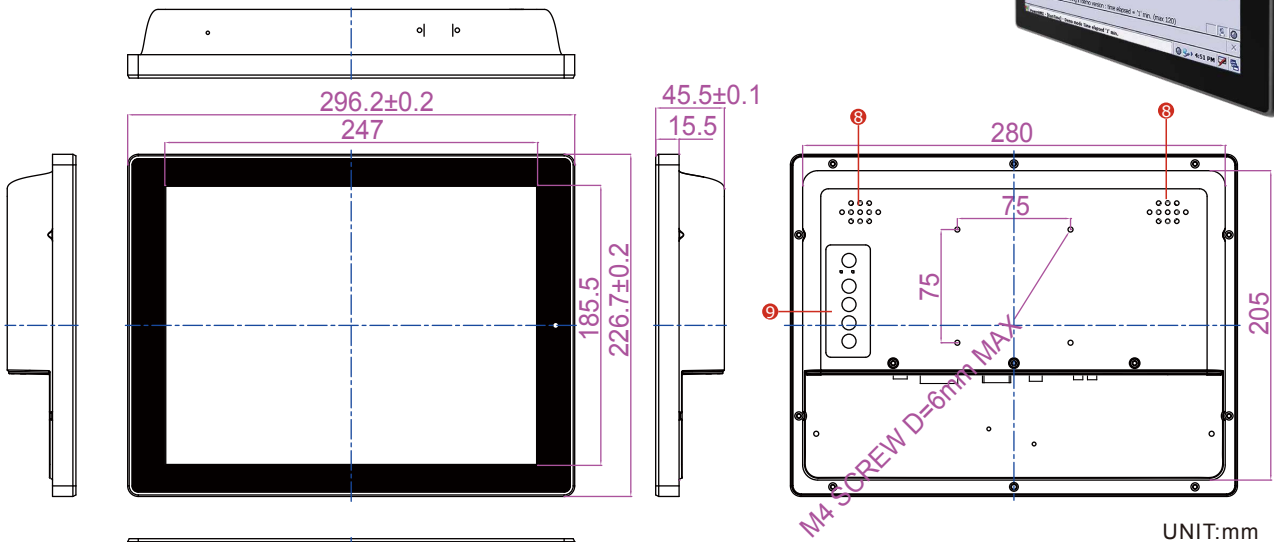

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

1. USB (Touch) x 1
2. Audio Jack x 2 (Optional)
3. S-Video x 1 (Optional)
4. Composite x 1 (Optional)
5. VGA x 1
6. DVI-D x 1 (Optional)
7. 12V DC Power Jack x 1
8. 1W Speaker x 2
9. OSD Control Panel x 1

Specifications

Display Spec :

- Size/Type : 12.1" TFT (4:3)
- Resolutions : 1024x768
- Brightness(cd/m²) : 500 cd/m² (typ.)
Optional for High brightness 1000 cd/m² (typ.)
- Contrast Ratio : 700 : 1 (typ.)
- Viewing Angle : -80~80(H); -70~70(V)
- Active Display Area(mm) : 245.76(H) x 184.32 (V)
- Pixel Pitch(mm) : 0.240 (H) x 0.240 (V)
- Touch : Projected Capacitive Touch
(optional protection glass)

Power Specification :

- Power Source : 12V DC, with External AC Adapter (100~240 AC)
- Power Consumption : 18 W typical, normal operation

Environment Considerations :

- Operating Temperature : -10 °C to 55 °C
- Operating Humidity : 10% to 95% (non-condensing)
- IP Rating : Front IP65

Input Specifications :

- Input Ports : 1 x VGA
1 x DVI-D (Optional)
1 x Composite (Optional)
1 x S-Video (Optional)
2 x Audio (Optional)
1 x 12V DC Power Jack
- USB Port (Touch) : 1 x USB 2.0
- Speaker : 2 x 1 Watt speaker

Mechanical Specification :

- Mounting : VESA Mount (100x100mm)
- Dimensions (W x H x D) : 296.2 x 226.7 x 45.5 (mm)

Product Optional :

- Accessory : Vesa Mounting Arm / Table Stand Mount

