P-Cap
LCD

# P-Cap Panel Mount LCD
# Front side IP65

## 15"P-Cap LCD

RoHS COMPLIANT 2011/65/EU

### Specifications

| | |
|---|---|
| Model Name | R15L600-PPC3HB |
| Viewable Size Image | 15" |
| Active Display Area (mm) | 304.1 (H) x 228.1 (V) |
| Pixel Pitch (mm) | 0.297 (H) x 0.297 (V) |
| Number of Pixels | 1024 x 768 |
| Contrast Ratio | 700:1 (typ.) |
| Display Color | 16.2M (6bit+FRC) |
| Brightness (cd/m²) | 1000 (typ.) |
| Viewing Angle (CR>=10) | -80~80; -70~70 |
| Synchronization Range Horizontal/Vertical | 31.5~60.0KHz/60~75Hz |
| Recommended Resolution | 1024x768@60Hz, 75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 25W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Touch Screen | Projective Capacitive multi-touch |
| Operating Temperature | 0 deg. C to 50 deg. C |

Remarks:R15L600 series= VGA input only
R15L630 series= VGA+Video Input

### Mechanical Drawing

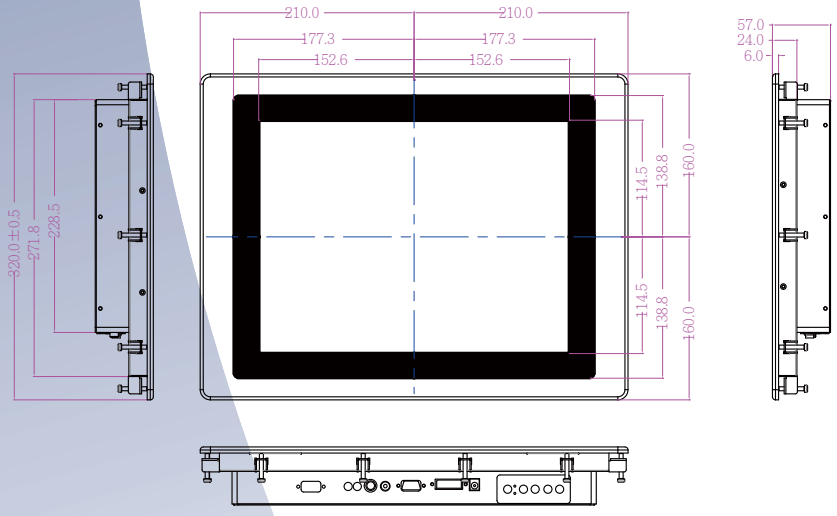


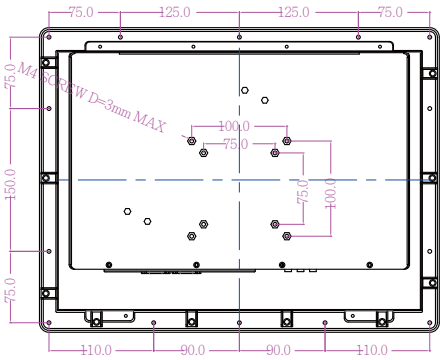


CUT OUT: 388*280 mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.