

## P-Cap Panel Mount LCD Front side IP65



### 19" P-Cap LCD


#### Specifications

**RoHS  
COMPLIANT  
2011/65/EU**

Model Name	R19L300-PPA1HB
Viewable Size Image	19"
Active Display Area (mm)	376.32 (H) x 301.056 (V)
Pixel Pitch (mm)	0.294 (H) x 0.294 (V)
Number of Pixels	1280 x 1024
Contrast Ratio	1000:1(typ.)
Display Color	16.7M (8 bits/colors)
Brightness (cd/m <sup>2</sup> )	1000(typ.)
Viewing Angle (CR>=10)	-85~85 (H); -80~80 (V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280 x 1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	27W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projective Capacitive multi-touch
Operating Temperature	0 deg. C to 50 deg. C

Remarks: R19L300 series= VGA input only  
R19L340 series= VGA+Video Input

#### Mechanical Drawing

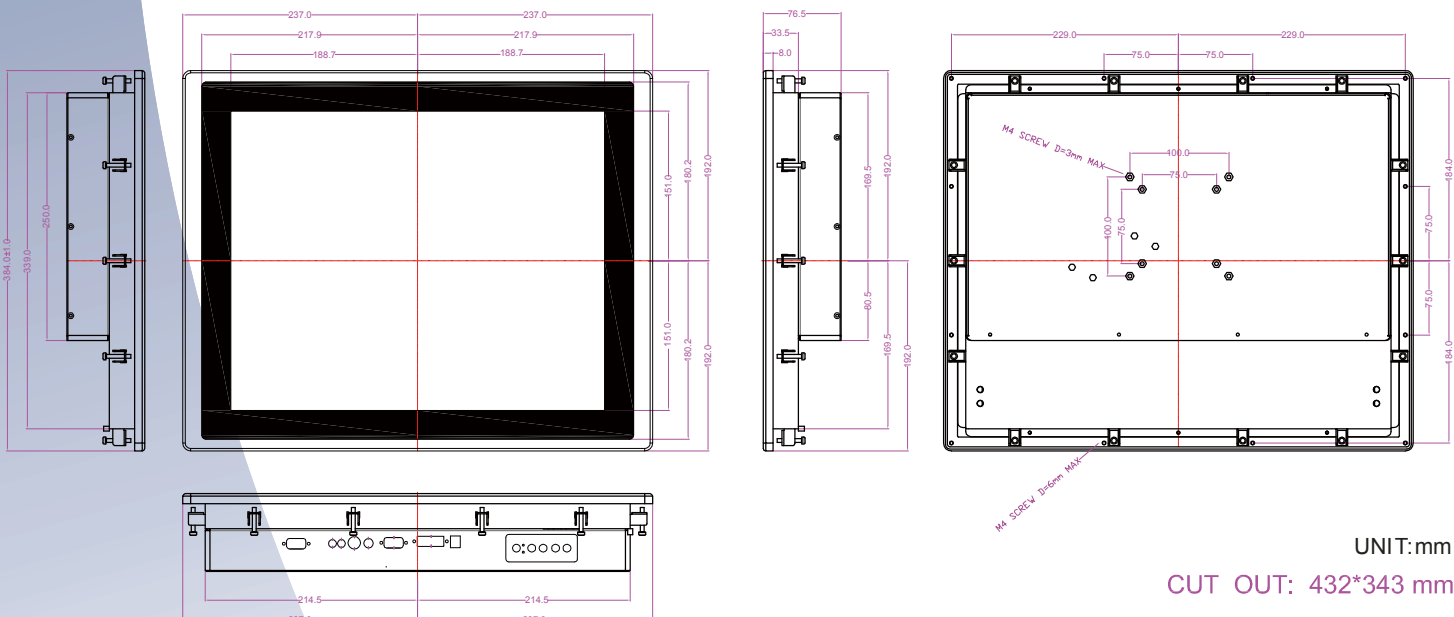

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.