

Chassis Monitor

17"

Specifications


Model Name	R17L500-CHM1
Viewable Size Image	17"
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280 x 1024
Contrast Ratio	1000:1 (typ.)
Display Color	16.7M
Brightness(cd/m ²)	350 (typ.)
Viewing Angle(CR>=10)	-85~85(H); -80~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280 x 1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	36W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW

Remarks: R17L500 series= VGA Input only

R17L540 series= VGA+Video Input



Mechanical Drawing

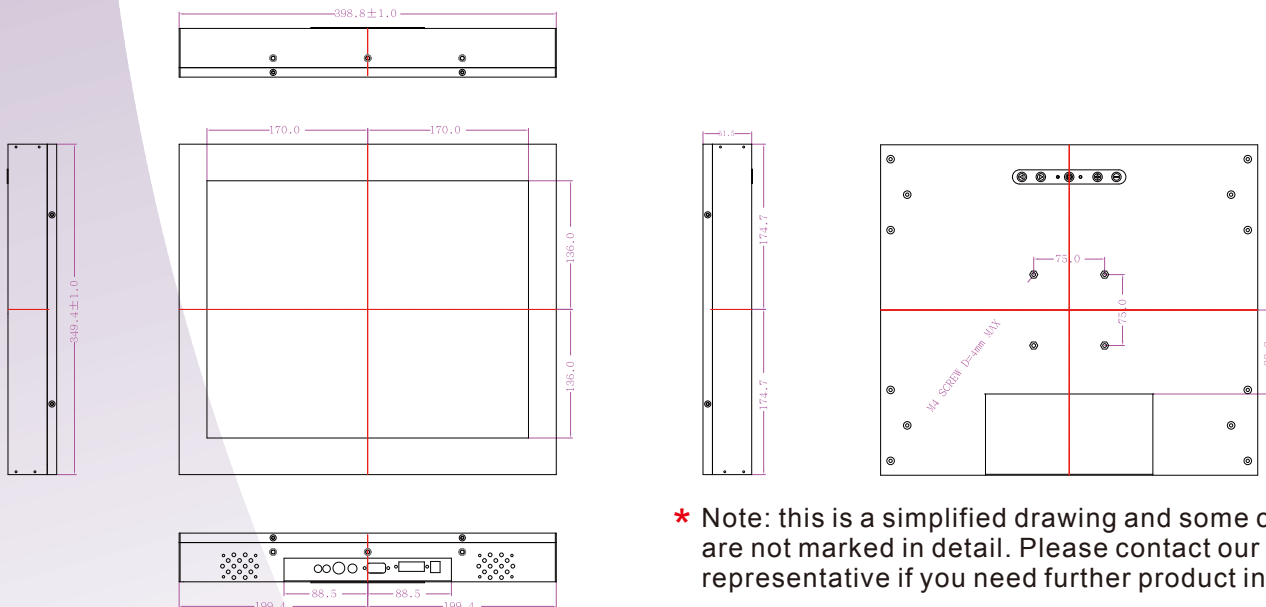

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.